Installation instruction

ARAT Special mount for Navigation Systems

Part-No.: NS 1034.4
for Chrysler Voyager
2001.....

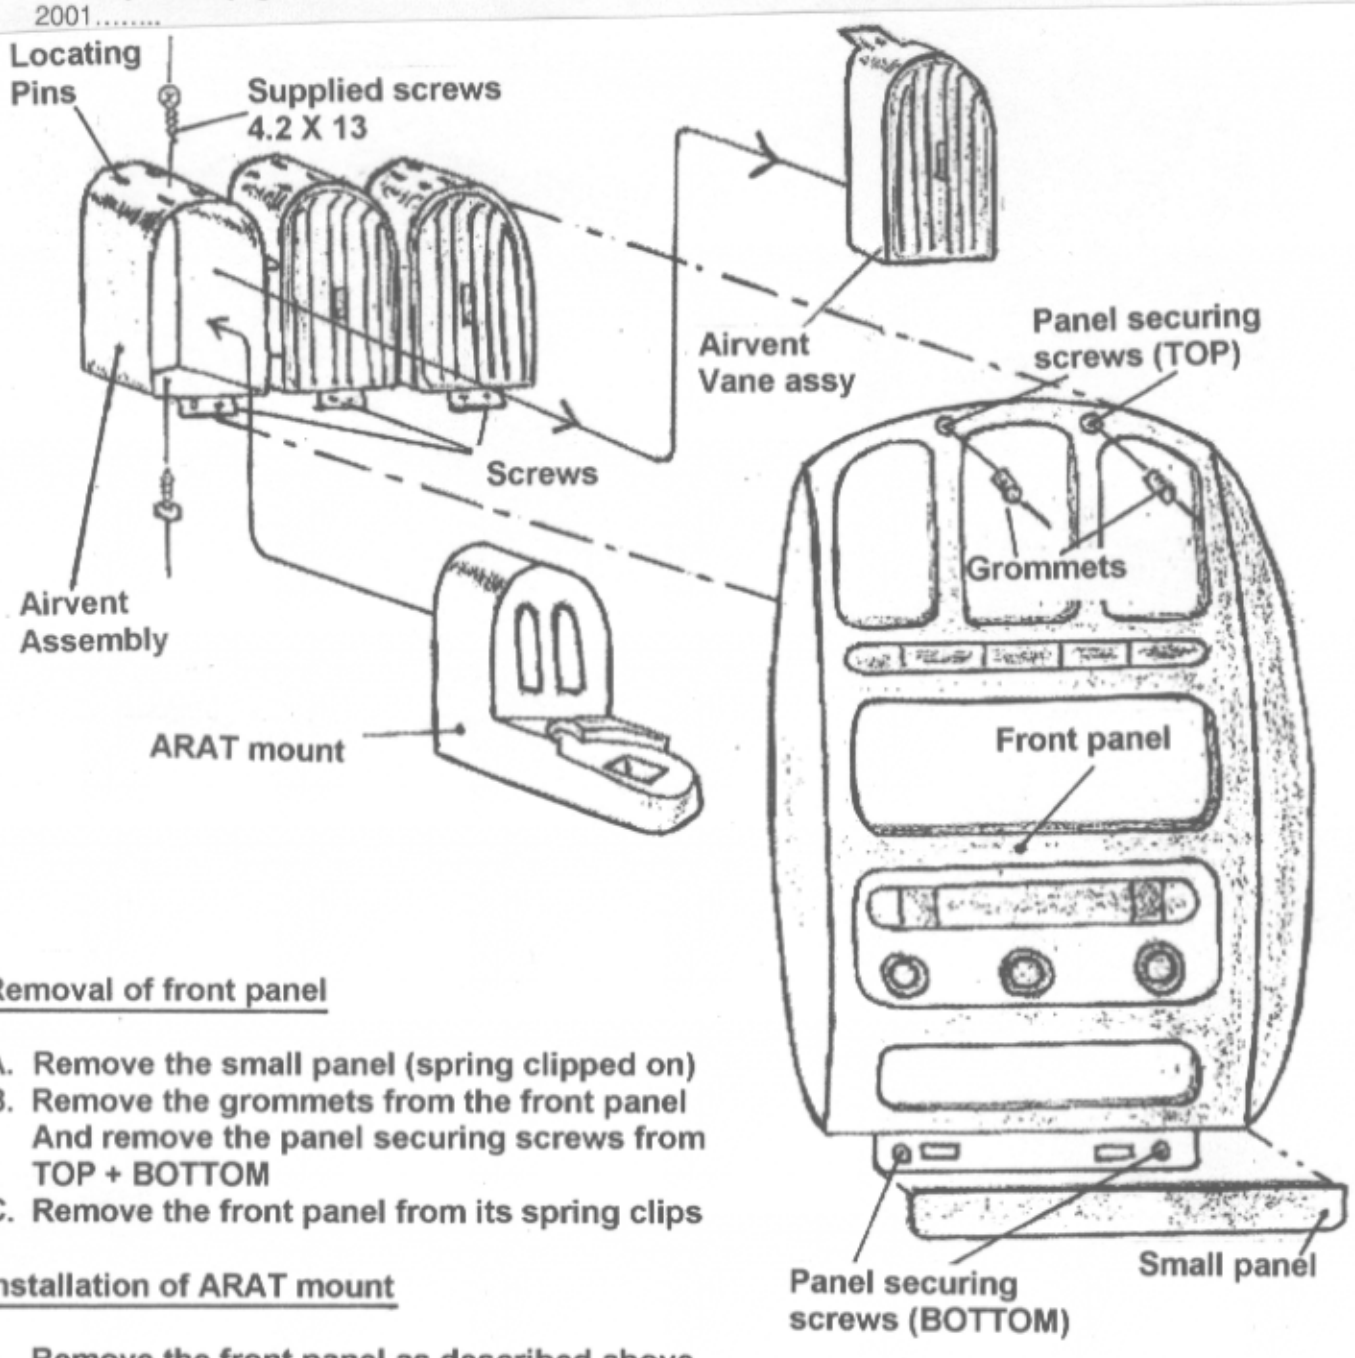

Removal of front panel

A. Remove the small panel (spring clipped on)
B. Remove the grommets from the front panel
   And remove the panel securing screws from TOP + BOTTOM
C. Remove the front panel from its spring clips

Installation of ARAT mount

1. Remove the front panel as described above
   Remove the airvent assembly from the front Panel (screws and locating pins)
2. Remove the left hand airvent vane assy from the airvent assy from the front
3. Place the ARAT mount into the airvent assy, and secure it with the supplied screws through the wall of the airvent assy into the pre-formed indentations of the ARAT mount (pre-drill)
4. Replace the airvent assy complete with the ARAT mount into the front panel assy.

Cable channeling: The display cable can be placed through the left hand airvent and placed in the preformed channel in the ARAT mount

ARAT GmbH-Hauptstrasse-33758 Stukenbrock, Germany Tel: (+49) 5207-8952-52 Fax. (+49) 5207-8952-68
E-mail. info@arat.de Website. www.arat.de